




AMWP1100

Self-Propelled Vertical Lifts

(Single Mast Steer)

AMWP8-1100 / AMWP9.5-1100

	AMWP8-1100	AMWP9.5-1100
S.W.L	150kg	125kg
Max.occupants	1	1
Working height	8.00m	9.50m
Platform floor height	6.00m	7.50m
Overall length	1.41m	1.41m
Overall width	0.76m	0.76m
Overall height	1.99m	1.99m
Platform size	0.78 X 0.70m	0.78 X 0.70m
Platform extension size	0.55m	0.55m
Ground clearance	0.05m	0.05m
Wheelbase	1.07m	1.07m
Turning radius (Inside)	0	0
Turning radius (Outside)	1.55m	1.55m
Drive motors	2X24VDC/0.5kw	2X24VDC/0.5kw
Lifting motor	24VDC/2kw	24VDC/2kw
Travel speed		
Stowed	4km/h	4km/h
Raised	1.1km/h	1.1km/h
Up/Down speed	24/25sec	31/24sec
Batteries	2X12V/120Ah	2X12V/120Ah
Integrated charger	24V/10A	24V/10A
Gradeability	25%	25%
Maximum slope	1.5°	1.5°
Tyres	φ 305X100mm	φ 305X100mm
Weight	1010kg	1070kg

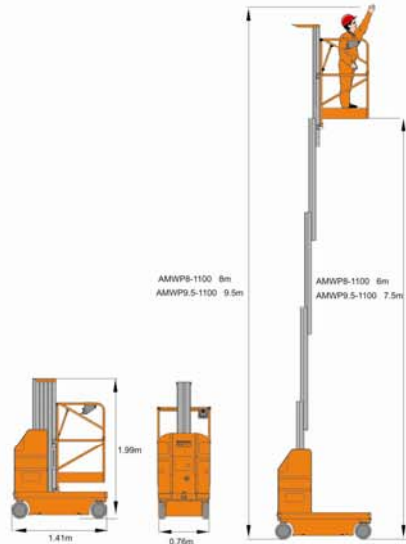

Pothole device



Tight turning radius



Forklift pockets



Gradeability



Emergency lowering system



Standard equipment

- Proportional controls
- Automatic pothole protection
- Self-closing gate on platform
- Drivable at full height
- Non-marking tyre
- 2WD
- Automatic brake system
- Emergency lowering system
- Emergency stop button
- Onboard diagnostic system
- Tilt sensor with alarm
- All Motion Alarm
- Horn
- Hour meter
- Forklift pockets
- Charger protection.
- Flashing beacon

Options

- Overload sensor with alarm
- AC power to platform
- Platform work lights
- Airline to platform