



AWP1000

Mobile Vertical Lifts

AWP8-1000 / AWP10-1000 / AWP12-1000 / AWP14-1000

	AWP8-1000	AWP10-1000	AWP12-1000	AWP14-1000
S.W.L	150kg	150kg	150kg	136kg
Max. occupants	1	1	1	1
Working height	8.00m	10.00m	12.00m	14.00m
Platform floor height	6.00m	8.00m	10.00m	12.00m
Overall Length(stowed)	1.37m	1.37m	1.43m	1.46m
Overall Length(tilted back)	/	/	/	3.13m
Overall width	0.75m	0.75m	0.75m	0.75m
Overall height(stowed)	1.97m	1.97m	1.97m	2.75m
Overall height(tilted back)	/	/	/	1.98m
Outrigger footprint(l/w)	1.75/ 1.55m	1.75/ 1.55m	1.83/ 1.55m	2.26/ 2.06m
Platform size	0.69x0.66m	0.69x0.66m	0.69x0.66m	0.69x0.66m
Ground clearance	0.05m	0.05m	0.05m	0.05m
Lifting motor				
AC	110-230VAC/1.5 kw	110-230VAC/1.5 kw	110-230VAC/1.5 kw	110-230VAC/1.5 kw
DC	12VDC/1.5kw	12VDC/1.5kw	12VDC/1.5kw	12VDC/1.5kw
Up/Down speed	38/34sec	36/30sec	44/36sec	62/47sec
Batteries	12V/120Ah	12V/120Ah	12V/120Ah	12V/120Ah
Integrated charger	12V/12A	12V/12A	12V/12A	12V/12A
Tyres				
Back wheels	8in	8in	8in	8in
Front wheels	5in	5in	5in	5in
Weight	328kg(AC)/358kg(DC)	376kg(AC)/406kg(DC)	394kg(AC)/424kg(DC)	492kg(AC)/522kg(DC)



Forklift pockets

Leveling indicator

Emergency lowering system



Crane attachment point

Mast cover


Outrigger storage sockets

Standard equipment

- Leveling outrigger device
- Emergency stop button
- Easy loading in pickup trucks
- Two controllers operation
- Emergency lowering system
- Leveling indicator
- Forklift pockets
- Transport tie hole
- Tilt back frame(Only for AWP14-1000)

Options

- Overload sensor
- AC power to platform
- All motion alarm
- Beacon

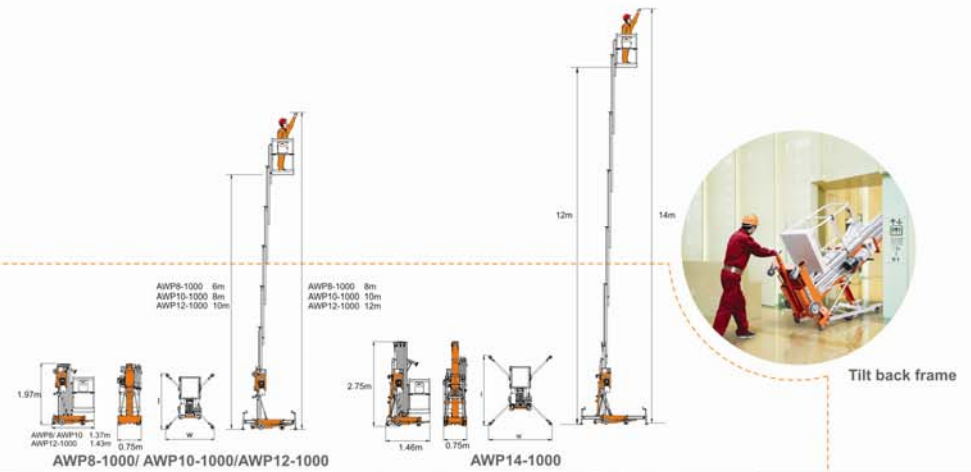

Tilt back frame



Outriggers with interlock



Lockable castor



Adjustable pickup rail



Ground control with outrigger LEDs