




# JCPT0807DC

## Self-Propelled Scissor Lifts

### JCPT0807DC

	S.W.L	230kg
	S.W.L on extension	113kg
	Max. Occupants	2
	Working height	7.8m
	Platform floor height	5.8m
	Overall length	1.86m
	Overall width	0.76m
	Overall height(Rails up)	2.18m
	Overall height(Rails down)	1.84m
	Platform size	1.67X0.74m
	Platform extension size	0.9m
	Ground clearance(Stowed)	0.09m
	Ground clearance(Raised)	0.019m
	Wheelbase	1.38m
	Turning radius(Inside)	0m
	Turning radius(Outside)	1.64m
	Drive motors	24V/0.5kw
	Lifting motor	24V/2kw
	Travel speed(Stowed)	5km/h
	Travel speed(Raised)	0.8km/h
	Up/Down speed	27/ 22 sec
	Batteries	4X6V/185Ah
	Integrated charger	24V/ 25A
	Gradeability	25%
	Maximum working slope	2 - 3 °
	Tyres	Φ305X100mm
	Weight	1240kg

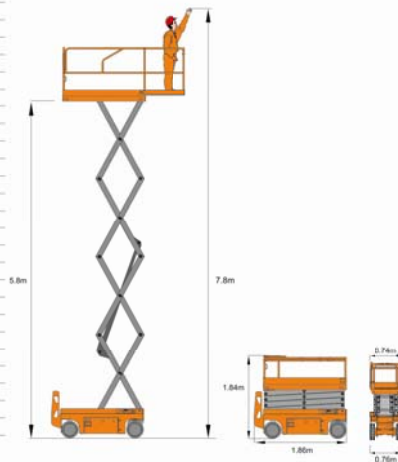

Swing out tray



Folding guardrails



Waterproof



Gradeability



Tight turning radius

### Standard equipment

- Proportional controls
- Automatic pothole protection
- Self-lock gate on platform
- Drivable at full height
- Non-marking tyre
- 2WD
- Automatic brake system
- Emergency lowering system
- Emergency stop button
- Cylinder holding valve
- Onboard diagnostic system
- Tilt sensor with alarm
- All Motion Alarm
- Horn
- Hour meter
- Safety brackets
- Forklift pockets
- Folding guardrails
- Extended platform
- Charger protection
- Flashing beacon

### Options

- Overload sensor with alarm
- AC power to platform
- Platform work lights
- Airline to platform

