

# JCPT(RT)

## Self-Propelled Rough-Terrain Scissor Lifts





	JCPT1523RT	JCPT1823RT
S.W.L	680kg	680kg
S.W.L On Extension	227kg	227kg
Max.Occupants	7	6
<b>A</b> Max Working Height	15.00m	18.00m
<b>B</b> Max.Platform Floor Height	13.00m	16.00m
<b>C</b> Overall Length(With/Without Outriggers)	4.88m/3.98m	4.88m/3.98m
<b>D</b> Overall Width	2.27m	2.27m
Overall Height(Rails Up)	2.98m	3.19m
<b>E</b> Overall Height(Rails Down)	2.28m	2.49m
Platform Size(Length/Width <b>F</b> )	3.98m×1.83m	3.98m×1.83m
<b>G</b> Platform Extension Size	2.59m	2.59m
Ground Clearance	0.22m	0.22m
<b>H</b> Wheelbase	2.86m	2.86m
Turning Radius(Inside/Outside)	2.35m/5.20m	2.35m/5.20m
Engine		
Kubota v2403-M-DI	36.5kW/2600rpm	36.5kW/2600rpm
Travel Speed(Stowed)	6.1km/h	6.1km/h
Travel Speed(Raised)	1.1km/h	1.1km/h
Up/Down Speed	70/52sec	123/74sec
Gradeability	50%	40%
Max.Working Slope	2°/3°	2°/3°
Hydraulic Tank	130L	130L
Diesel Tank	100L	100L
Tyres	33×12-20	33×12-20
Weight(With/Without Outriggers)	8200kg/7680kg	9190kg/8670kg

### Standard Equipment

- Proportional Controls
- Self-lock Gate On Platform
- Automatic Brake System
- Anti-restart Engine Protection
- Onboard Diagnostic System
- Slide-out Engine Tray
- Safety Electric Pump
- Emergency Stop Button
- Cylinder Holding Valve
- Dual Extended Platforms
- Horn
- Hydraulic Oil Cooler
- Folding Guardrails
- All Motion Alarm
- 4WD
- Safety Brackets
- Hour Meter
- Flashing Beacon
- Tilt Sensor With Alarm

### Options

- Automatic Leveling Hydraulic Outriggers
- Overload Sensor With Alarm
- Hydraulic Generator
- Hydraulic Compressor
- Hydraulic Water Pump
- AC Power To Platform
- Hydraulic Welder
- Platform Work Lights
- Non-marking Tyre
- Oscillating Chassis

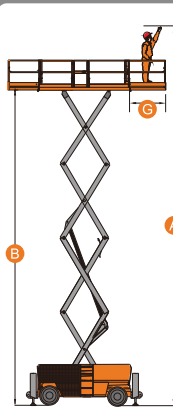

Flashing Beacon



Slide-Out Engine Tray



Automatic Leveling Outriggers



Fully Protected Chassis



Waterproof



Extended Platform



Folding Guardrails



Gradeability